

# Deka® High Rate

## HR7500ET

- Exclusive IPF® Technology optimizes power capacity, cell consistency, and long-term reliability
- THT™ plastic case specifically formulated to optimize compression
- Advanced AGM technology for superior high-rate power
- Puncture resistant micro-porous glass mat separators extend life
- Front access design for easy installation and maintenance
- Reinforced case resists bulging and meets safety requirements (UL 94 V-0)
- Case & cover heat sealed and 100% tested to prevent leaks
- Epoxy-sealed posts eliminate leaks
- Flame arresting, low pressure, self-sealing valves are 100% factory tested
- Computer-aided design and manufacturing control processes and standards to ensure quality products
- All batteries meet or exceed IEEE recommended practices
- Battery design and construction meet UL recognition requirements
- Plate thickness optimized for long life
- Guaranteed 100% initial string capacity when tested in accordance with IEEE 1188



### SPECIFICATIONS

**Nominal Voltage:** 12-Volts

**Rating:** 750 Watts/Cell @ 15 min. rate  
to 1.67 V.P.C.

**Positive Plate:** >98% Pure lead with tin-calcium alloy

**Negative Plate:** Pure lead, calcium alloy

**Post Seal:** Epoxy-sealed

**Terminal:** Front access, 1/4" – 20 threaded insert

**Case/Cover:** Flame-retardant, THT™ –  
UL 94 V-0/>39% L.O.I.

**Safety Vent:** Low positive pressure,  
self-sealing w/ flame arrestor

**Float Voltage:** 2.25 V.P.C. ± 0.01 V.P.C. @ 77°F (25°C)

**Design life:** 10 years in float applications @ 77°F (25°C)


**Dimensions:** Length - 24.00" (609.6 mm)  
Width - 4.97" (126.3 mm)  
Height - 12.74" (323.5 mm)

**Weight:** 150 lbs. (68 kg)

### DISCHARGE RATINGS IN WATTS PER CELL @ 77°F (25°C)\*

Volts per Cell (V.P.C.)	1 MIN.	5 MIN.	10 MIN.	15 MIN.	20 MIN.	30 MIN.	40 MIN.	50 MIN.	60 MIN.
1.60	N/A	1196	960	795	671	510	412	345	299
1.63	N/A	1157	932	777	663	507	410	344	298
1.65	N/A	1128	912	764	653	503	408	342	297
1.67	N/A	1098	892	750	644	499	406	341	296
1.70	N/A	1052	857	723	626	492	403	339	294
1.75	N/A	961	791	674	587	467	387	330	289

\*Subject to change without notice.

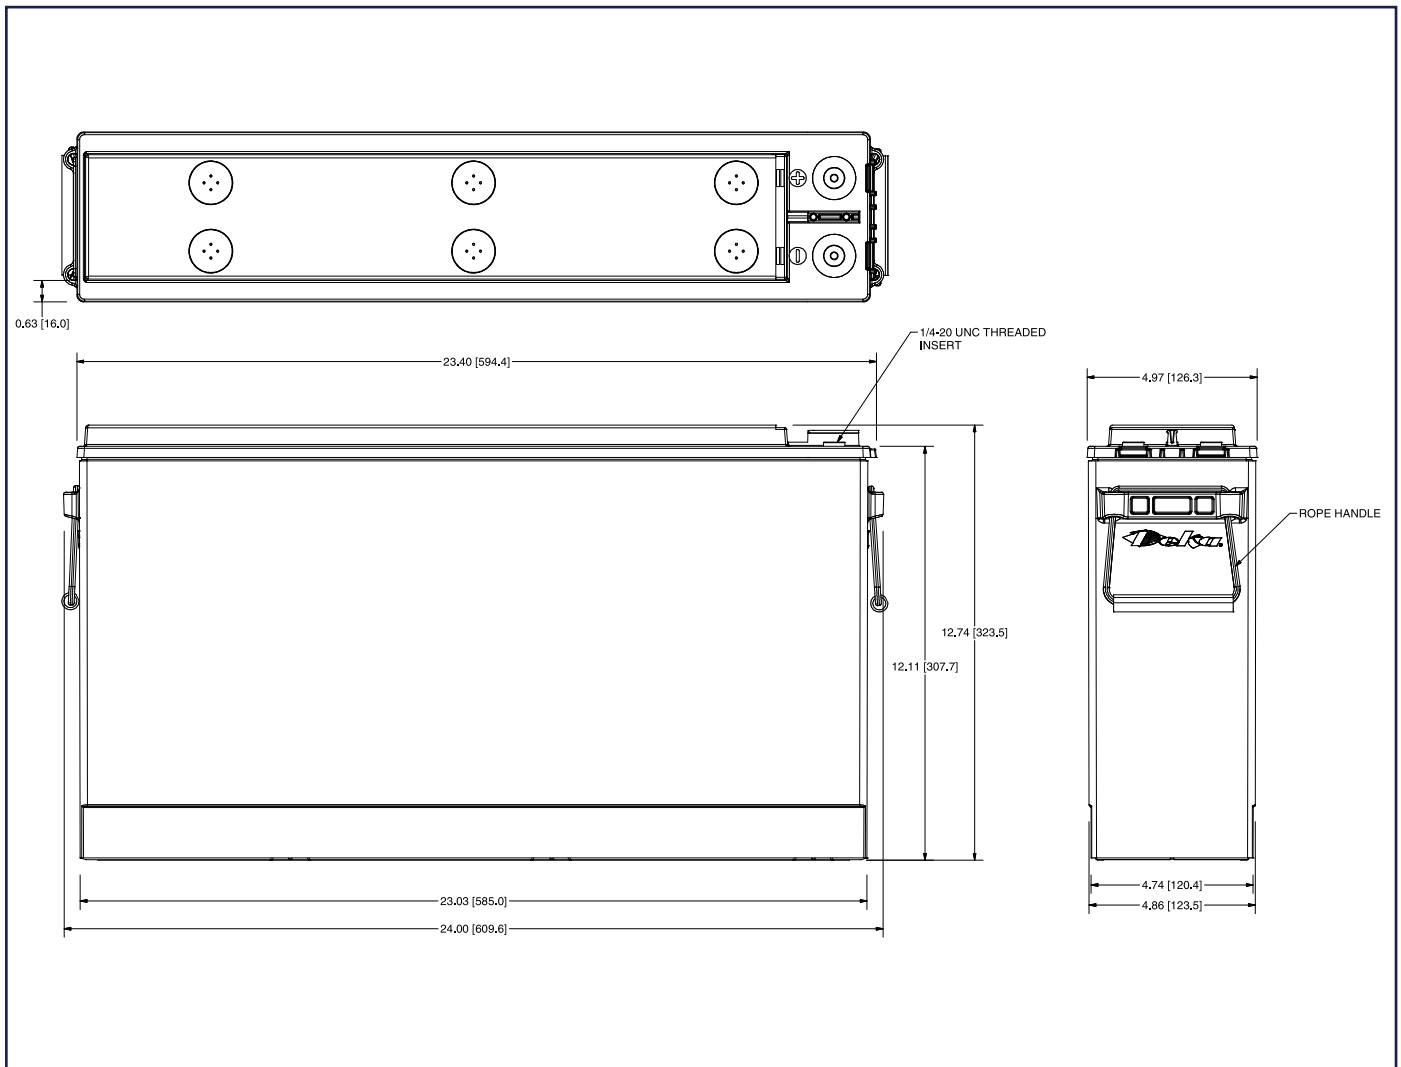

### OPTIONAL FACTORY ACCEPTANCE TESTING

- More economical than performing a load test on site
- Confirms published capacity rating of product
- Establishes a factory baseline ohmic reading
- Formal test report provided
- Contact your East Penn Mfg. representative for additional information


### TESTING SPECIFICATIONS

- Exceeds IEEE-1188 standards
- 10 minute battery rate to 1.67 V.P.C.
- Constant power discharge
- String  $\geq$  100% capacity — All individual batteries  $\geq$  95% capacity
- Conductance readings taken before the test
- Battery voltage recorded on report every 2 minutes

### INSTALLATION AND OPERATING INSTRUCTIONS

<http://www.eastpennmanufacturing.com/wp-content/uploads/High-Rate-IO-Manual-0970.pdf>

**PROPOSITION 65 WARNING:** Battery posts, terminals and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm. Batteries also contain other chemicals known to the State of California to cause cancer. **WASH HANDS AFTER HANDLING.**



[www.dekabatteries.com](http://www.dekabatteries.com)

QUALITY SYSTEM  
CERTIFIED  
**ISO 9001**  
**IATF 16949**  
ENVIRONMENTAL  
SYSTEM CERTIFIED  
**ISO 14001**



East Penn Manufacturing Co.

Lyon Station, PA 19536-0147

Phone: 610-682-3263

Fax: 610-682-0891

e-mail: [reservepowersales@dekabatteries.com](mailto:reservepowersales@dekabatteries.com)